

A richiesta
On demand

30
ANNI di
GARANZIA
YEARS
WARRANTY
CON WITH
TATA STEEL

Solarpan® Plus deck REI


L'alloggio in poliisocianurato resistente al fuoco per impianti interni a soffitto
The polyisocyanurate fire resistant housing for indoor ceiling systems



SOLARPAN PLUS® DECK REI viene impiegato per realizzare coperture piane autoportanti, destinate generalmente ad accogliere un manto superiore di membrana impermeabilizzante (bitume-polimero, PVC o elastomerica), da applicare in opera. La conformazione della greca permette di sfruttare delle staffe di aggancio che si incastrano alla lamiera interna per poter installare impianti a soffitto senza la necessità di forare il pannello.
REI 30 per pannello sp. 100-120-150 mm.

SOLARPAN PLUS® DECK REI is used to create flat self-supporting roofs, generally intended to house an upper coat of waterproof membrane (bitumen-polymer, PVC or elastomeric), to be applied on site.

The shape of the fret allows to take advantage of the hooking brackets to install systems on the ceiling without the need to drill holes in the panel.
REI 30 for panel th. 100-120-150 mm.

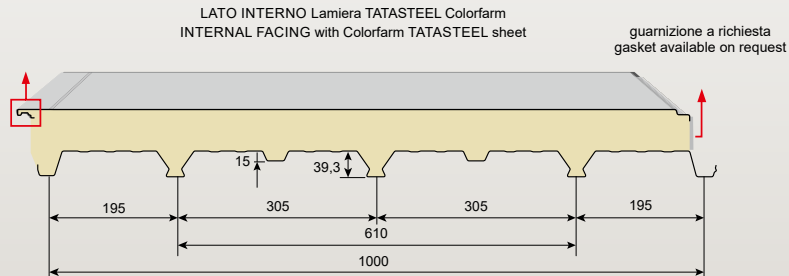

U trasmissione transmittance	100	120	150
W/m ² K	0,22	0,19	0,15
Kcal/m ² h °C	0,19	0,16	0,13

