

Na zahtjev
On request
Vanjska strana
External side
30
GODINA
GARANCIJE
YEARS
WARRANTY


PUR PIR

Eurocinque® exclusive

Ekskluzivni proizvod višestruke upotrebe
Exclusive product for multiple use


Zahvaljujući tehnološkim inovacijama i kontinuiranom radu na uvođenju novih proizvoda na tržište, Lattonedil® predstavlja liniju EUROCINQUE® EXCLUSIVE, specijalni proizvod odličnih izolacionih i statičkih karakteristika. Visokoperformantni panel sa duplim limom ili sa unutrašnjom stranom od aluminijumske folije, terpapira, fibreglasa, ali i sa ogoljenom unutrašnjom stranom (samo poliuretan).

Thanks to technological innovations and continuous work on introducing new products to the market, Lattonedil® presents new line EUROCINQUE® EXCLUSIVE, a special product with excellent isolation and static characteristics. High-performance panel with double side sheet metal or with inner side of aluminum foil, tar-paper, fiberglass, but also with bare inner side (polyurethane only).

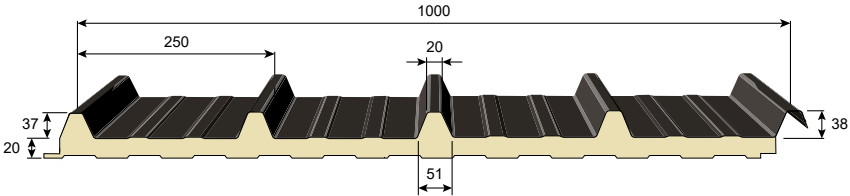

Donja strana panela: fibreglas, karton, aluminijum ili samo PUR (odrediti prilikom naručivanja)

Lower side of the panel in: Fiberglass, paper-felt, Bijeli aluminijum only PUR (to be specified when ordering)

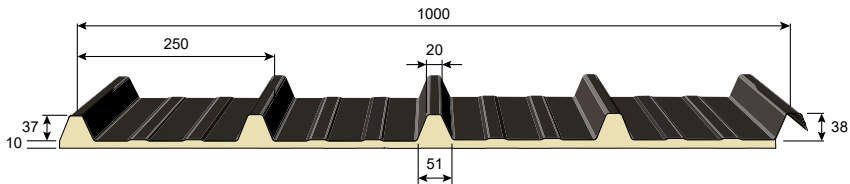

Donja strana panela: fibreglas, karton, aluminijum ili samo PUR (odrediti prilikom naručivanja)

Lower side of the panel in: Fiberglass, paper-felt, Bijeli aluminijum only PUR (to be specified when ordering)

Mikroliniranje sa DONJE strane (navodi se prilikom naručivanja)
Micro-veining of the LOWER side of the panel (to be specified when ordering)



Rešetkasti / Staved



Prugasti / Scored



Dijamantski / Diamond



Glatki / Smooth



Debljina 20 mm

SPOLJAŠNJI lim
Čelik 0,4 mm
UNUTRAŠNJI lim
Čelik 0,4 mm

EXTERNAL facing
Steel 0.4 mm
INTERNAL facing
Steel 0.4 mm

Širina efektivnog raspona: 120mm
Effective span width: 120 mm

Statička svojstva (kg/m²)
Static properties (kg/sq.m.)

NA DVA NOSAČA
SINGLE SPAN

Debljina panela Panel thickness (mm)	1.5	2	2.5	3	TEŽINA WEIGHT (Kg/m ²)
20	230	185	100	30	7.04

Proračun statičkih dimenzija izveden u skladu sa Aneksom E UNI EN 14509 standard. Normalna granica otklona: 1/200 ℓ
Static sizing calculation performed in accordance with Annex E of the UNI EN 14509 standard. Normal deflection limit: 1/200 ℓ

Debljina 10 / 20 mm monolamiera

SPOLJAŠNJI lim
Pocinčani čelik
UNUTRAŠNJI lim
Fibreglas

EXTERNAL facing
Prepainted
zinc-plated steel
INTERNAL facing
Fibreglas

Širina efektivnog raspona: 120mm
Effective span width: 120 mm

Statička svojstva (kg/m²)
Static properties (kg/sq.m.)

NA DVA NOSAČA
SINGLE SPAN

Debljina metalne ploče Metal sheet thickness (mm)	1	1.25	1.5	1.75	2	2.25	2.5	2.75	3	3.25	3.5	TEŽINA WEIGHT (Kg/m ²)	TEŽINA WEIGHT (Kg/m ²)
0.4	340	225	156	114	88	65						3.93	4.31
0.5	495	322	224	164	126	93	68					4.69	5.07
0.6	595	381	265	195	148	111	81	61				5.65	6.03
0.8	795	508	353	259	198	149	108	81	63	49		7.56	7.94

Proračun statičkih dimenzija izveden u skladu sa Aneksom E UNI EN 14509 standard. Normalna granica otklona: 1/200 ℓ
Static sizing calculation performed in accordance with Annex E of the UNI EN 14509 standard. Normal deflection limit: 1/200 ℓ

U	10	20
Toplotna provodljivost Transmittance		
W/sq.m. K	1.43	1.00
Kcal/sq.m. h °C	1.23	0.86

Ostali metali i raličite debljine su dostupne na zahtjev
Other metal supports and different thicknesses are available upon request.

LATTONEDIL

